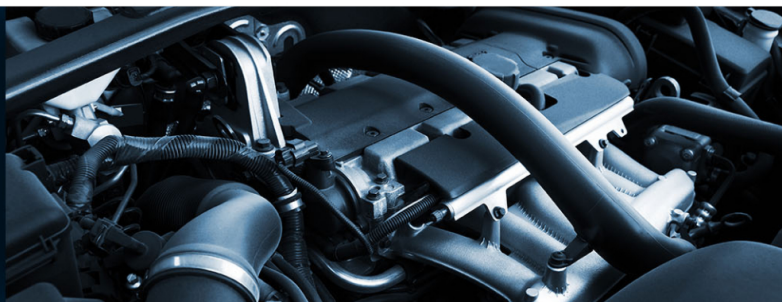


SAE 100 R14A Non Conductive

Smooth bore nominal ID


[← PREVIOUS](#)
[NEXT →](#)


Characteristics

Description: 300 Series stainless steel wire braid reinforced non conductive nominal ID PTFE hose

Applications: Automotive, hydraulics, paints, solvents, marine, food & beverage

Temperature Range: -100°F to +450°F (-73°C to +232°C) Continuous

Construction

Tube: FDA compliant Khemgard® PTFE for increased flexibility

Reinforcement: 300 Series stainless steel braid

Available upon request: Special covers such as silicone and PU. Please contact MTO for more information.

Code	I.D. (in)	O.D. (in)	Working Pressure (PSI)	Burst Pressure (PSI)	Vacuum (Hg)	Bend Radius (in)	Weight (lbs/ft)
SB-03	0.13	0.23	3000	12000	28.9	0.98	0.04
SB-04	0.19	0.30	3000	12000	28.9	1.38	0.05
SB-05	0.25	0.35	3000	12000	28.9	1.77	0.06
SB-06	0.31	0.43	2500	10000	28.9	1.97	0.09
SB-06T	0.37	0.49	2250	9000	28.9	2.17	0.1
SB-08	0.41	0.52	2000	8000	28.9	2.56	0.11
SB-10	0.50	0.62	1750	7000	28.9	2.76	0.14
SB-12	0.63	0.75	1500	6000	15	5.12	0.17
SB-12T	0.75	0.87	1100	4400	15	7.48	0.22
SB-16	0.87	1.01	1000	4000	13	9.84	0.24
SB-16T	1.00	1.15	900	3600	13	10.63	0.3
SB-20Z	1.13	1.28	1000	4000	11	11.81	0.35

[← PREVIOUS](#)
[NEXT →](#)